


101S1

Hydraulic winch 15 kN capacity with two large-groove side capstans for stringing LV and MV overhead lines, hoisting and tower erection as well as underground cabling and sagging.

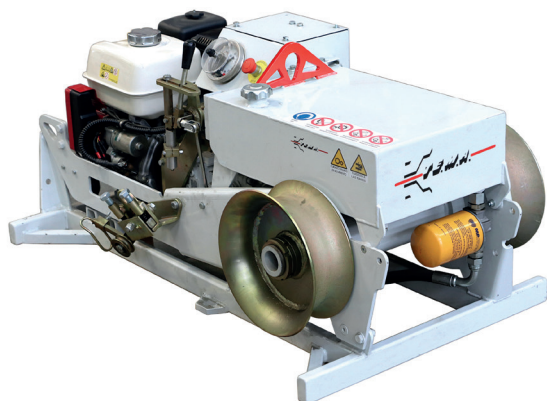

Performance

Max pull	15 kN
Max speed	35 m/min
Speed at max pull	13 m/min

Characteristics

Capstan bottom groove (panel side)	ø 200 mm
Capstan bottom groove (opposite)	ø 250 mm
Weight	320 kg

Engine

Petrol	(11,5 hp) 8,5 kW
Cooling	Air
Starter	Electrical

Standard features

- 1 hydraulic circuit with negative brake system
- 1 dynamometer for direct reading of pulling value with load-limiter device
- Rope holder clamps for large-groove capstans
- Balanced top lifting point and anchoring attachments

Optional equipment

- 02-PW Trailer kit with rigid axle for manual towing
- 17-PW Special drum with automatic spooler device (rope capacity 200 m ø 8 mm)

