


# PULLER

## 107R5

Hydraulic puller 50 kN capacity for single rope pulling on overhead stringing operations as well as underground cabling.

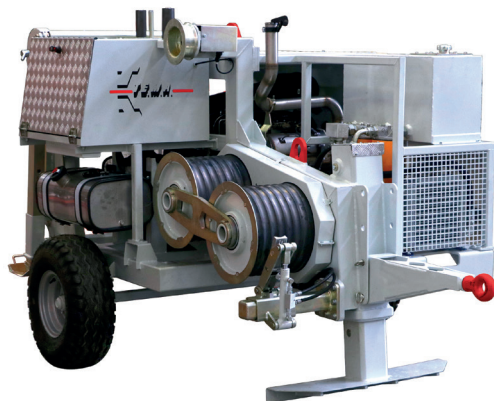

### Performance

Max pull	50 kN
Max speed	5 km/h
Speed at max pull	2,1 km/h

### Characteristics

Bull-wheels diameter	400 mm
Max rope diameter	16 mm
Weight	2300 kg

### Engine

Diesel	(73 hp) 54 kW
Cooling	Liquid
Emission standard - (UE)2016/1628	Stage V

### Standard features

- 1 hydraulic circuit with negative brake system
- 1 dynamometer for direct reading of pulling value with load-limiter device
- Thermally treated steel bull-wheels
- Automatic reel-winder suitable for steel reel 1100-1400 mm
- Remote control unit c/w console 5 m cable
- Rigid axle with tyres for towing up to 30 km/h
- Balanced top lifting point and anchoring attachments

### Optional equipment

- 01-PW Preset for digital data recorder, counter-meter and speedometer
- 05-PW Rope holder clamp (hydraulic)
- 06-PW Roller guiding device for underground laying
- 07-PW Hydraulic power take-off for remote reel-winder

### Special features upon request

- 04-PW Radio control unit
- 13-PW Pre-heater (up to -30°C)
- 18-PW Counter-meter device
- 20-PW Dynamic speed pulling force control
- 36-PW Engine emission standard Stage IIIA - (85 hp) 63 kW

