




250...R

SWIVEL JOINT

Made of high tenacity galvanized steel, it is used as a junction element.

| MODEL | A | B | Rope Ø | Capacity | Breaking load | Weight |
|---------|----|-----|--------|----------|---------------|--------|
| | mm | mm | mm | kN | kN | kg |
| 250 AR | 32 | 120 | 15 | 26.7 | 80 | 0,50 |
| 250 BCR | 45 | 170 | 19 | 60 | 180 | 1,20 |
| 250 DR | 60 | 212 | 24 | 120 | 360 | 3,00 |
| 250 ER | 77 | 320 | 28 | 250 | 750 | 8,20 |

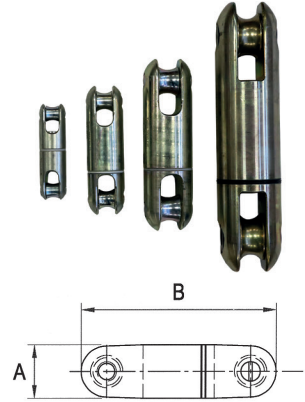


250...

SWIVEL ARTICULATED JOINT

Made of high tenacity galvanized steel, it is used as a junction element.

| MODEL | A | B | Rope Ø | Capacity | Breaking load | Weight |
|-------|----|-----|--------|----------|---------------|--------|
| | mm | mm | mm | kN | kN | kg |
| 250 | 20 | 62 | 6 | 8,3 | 25 | 0,10 |
| 250 A | 32 | 125 | 10 | 20 | 60 | 0,50 |
| 250 B | 45 | 188 | 15 | 40 | 120 | 1,50 |

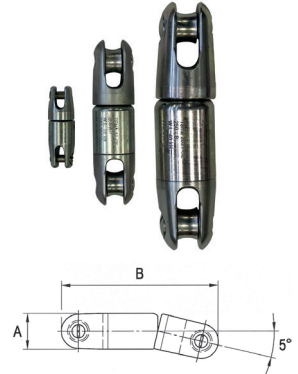

GF...

"U" TYPE FIX JOINT

Made of high tenacity galvanized steel, it is used as junction element.

This joint is designed to be used on bull-wheels.

| MODEL | Dimensions (mm) | | | | | | Capacity | Breaking load | Weight |
|-------|-----------------|------|------|----|------|------|----------|---------------|--------|
| | A | B | C | D | E | R | kN | kN | kg |
| GF 10 | 59 | 28,5 | 15,5 | 10 | 22,5 | 12 | 20 | 60 | 0,15 |
| GF 13 | 72 | 41 | 19,5 | 13 | 26 | 16 | 33 | 100 | 0,35 |
| GF 16 | 90,5 | 48,5 | 20 | 16 | 41 | 19 | 53 | 160 | 0,6 |
| GF 18 | 100,5 | 56 | 22 | 18 | 47,5 | 21,5 | 70 | 210 | 0,75 |
| GF 24 | 121 | 61 | 28 | 24 | 60 | 22 | 120 | 360 | 1,1 |
| GF 28 | 175 | 76 | 42 | 28 | 65 | 32,5 | 250 | 750 | 3,1 |
| GF 30 | 183 | 81 | 44 | 32 | 70 | 34,5 | 250 | 750 | 3,4 |

