




070/...

SAGGING BRIDGE


Made of light aluminum alloy, welded [Certified TIG system] modular structure complete with balanced hanging point, stay rod assembly (to suit different compositions and lengths) and galvanized steel lifeline (anti-fall barrier).

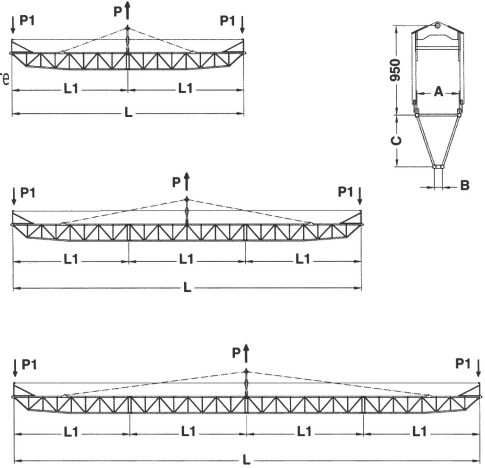


Upon request:

- press trolley track **Mod. 070/BP**;
- press trolley 360° angle rotation **Mod. 070/BPC** (weight 12 kg);
- Additional anti-fall barrier **Mod. 070/BAC**;
- Different lengths and compositions.

MODEL	Working load (P) (Max P1=300daN)	Breaking load	Total length (L)	Composition (L1)	Dimensions (mm)			Weight with antifall barrier kg
		daN	m		A	B	C	
070/4	600	1800	4	4	350	85	390	50
070/5	600	1800	5	5	350	85	390	56
070/6	600	1800	6	6	350	85	390	62
070/6.2	600	1800	6	3+3	350	85	390	65
070/7.2	600	1800	7	3,5+3,5	350	85	446	77
070/0.2	600	1800	8	4+4	350	85	446	86
070/10.3	600	1800	10	4+2+4	350	85	446	103
070/12.3	600	1800	12	4+4+4	350	85	446	115
070/14.3	600	1800	14	5+4+5	350	85	446	126
070/16.4	600	1800	16	4+4+4+4	350	85	446	144
070/10.3	600	1800	18	6+6+6	350	85	446	160
070/20.4	600	1800	20	5+5+5+5	450	85	550	200
070/24.4	600	1800	24	6+6+6+6	450	85	550	254

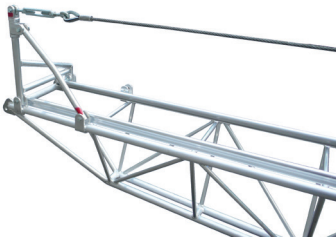

Lifeline (anti-fall barrier) **Mod. DT070BAC...**
(Certified as "HORIZONTAL ANTI-FALL LIFE-LINE") EN 795 by
ANCCP Certification Agency.

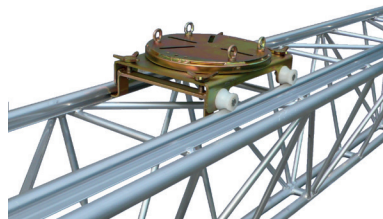

Press trolley rails **Mod. DT070BP**
Press trolley **Mod. DT070BPC**