

ALUMINUM ALLOY EQUIPMENT FOR OVERHEAD LINES


034/4

LINE CARTS / INSPECTION TROLLEYS FOR BUNDLED CONDUCTORS



This model is designed for overpassing existing spacers. Suitable for 2,3 or 4 bundled conductor configurations. 2 linemen towable trolley, with four cross-arms and one positioning bar complete with aluminum wheels on ball-bearings and anti-slip floor, N°2 stationary brakes, safety frame ropes and counter-meter device. Made of welded aluminum alloy (certified TIG system).

Upon request:

- Nylon wheels;
- Earthing device;
- Openable and articulated arms;
- "Custom-made" size available;
- Lifting/positioning device **Mod. DT034MDSR**
- Anchoring point in compliance with UNI EN 795:2012.

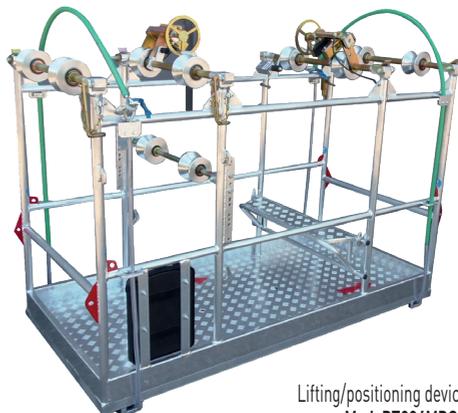

Lifting/positioning device
Mod. DT034MDSR

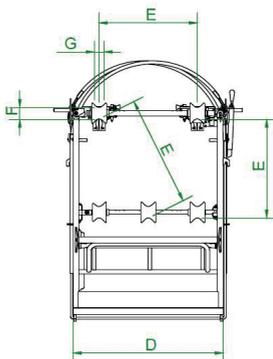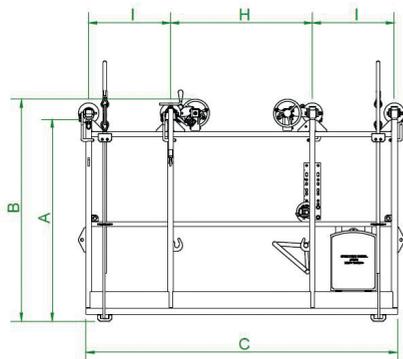

Openable and articulated arms



MODEL	N° linemen	A	B	C	D	E	F	G	H	I	Weight kg	Working load daN	For bundle
		mm	mm	mm	mm	mm	mm	mm	mm	mm			
034/4-A	2	1042	1250	1900	915	400	70	55	865	500	105	200	
		457											
		500											
		600											
034/4-B	2	1142	1350	1900	915	400	70	55	865	500	112	200	
		457											
		500											
		600											

034/M/4

MOTORIZED LINE CARTS / INSPECTION TROLLEYS FOR BUNDLED CONDUCTORS

This model is designed for overpassing existing spacers.
 Suitable for 2,3 or 4 bundled conductor configurations.
 2 linemen towable trolley, with aluminum wheels mounted on four cross-arms and 1 positioning bar, anti-slip floor, n°2 stationary brakes, safety frame ropes and counter-meter device
 Hydraulic driven transmission, aluminum traction wheels with rubber liners.
 Made of welded aluminum alloy (certified TIG system).

Features and performances:



- 4 stroke gasoline engine – 4 hp (2.95 kW);
- Max speed 30 m/min (both directions);
- Maximum slope 40% (22°).

Upon request:

- Nylon wheels;
- Earthing device;
- Openable and articulated arms;
- "Custom-made" size available;
- Lifting/positioning device **Mod. DT034MDSR**;
- Anchoring point in compliance with UNI EN 795:2012.



Lifting/positioning device
Mod. DT034MDSR

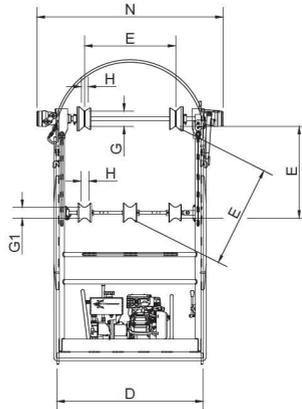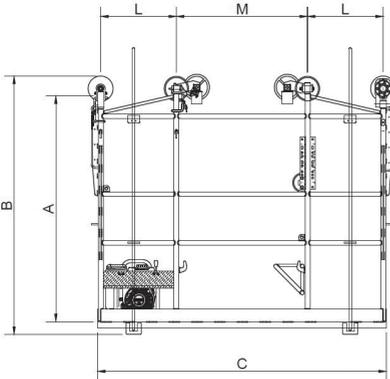

Openable and articulated arms



MODEL	N° linemen	A	B	C	D	E	G	G1	H	N	Weight	Working load	For bundle
		mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	daN	
034/M/4	2	1470	1700	1900	940	400	100	70	55	1250	218	200	
		457											
		500											
		600											