


# PULLER

## 104R3

Hydraulic puller 30 kN capacity with automatic reel-winder suitable for underground cable installations.

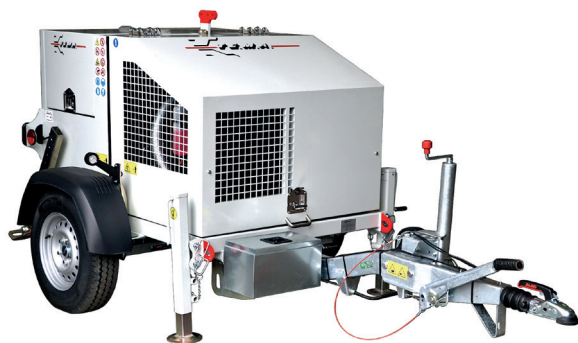

### Performance

Max pull	30 kN
Max speed	45 m/min
Speed at max pull	15 m/min

### Characteristics

Bull-wheels diameter	200 mm
Max rope diameter	10 mm
Rope length	1000 m
Weight without rope	1100 kg

### Engine

Diesel	[25 hp] 19 kW
Cooling	Liquid
Emission standard - (UE)2016/1628	Stage V

### Standard features

- Standard features
- 1 hydraulic circuit with negative brake system
- Control panel equipped with LCD touch screen 7" display which includes: preset for the maximum pulling force and instant indication, counter-meter, speed indicator and worked hours.
- USB output for pulling data recording
- Remote control unit c/w console 5 m cable
- Road trailer kit 1600 kg capacity (80 km/h) with fixed drawbar and ball coupling
- Balanced top lifting point and anchoring attachments

### Optional equipment

- 04-PW Radio control unit
- 06-PW Roller guiding device equipable with Telescopic rod cod. AT1.30
- 28-PW T4L remote monitoring system with GPS geolocation

### Special features upon request

- 13-PW Pre-heater (up to -30°C)
- 36-PW Engine emission standard Stage IIIA - (25 hp) 19 kW

