




107R24

Hydraulic puller 240 kN capacity for single rope pulling on overhead stringing operations.

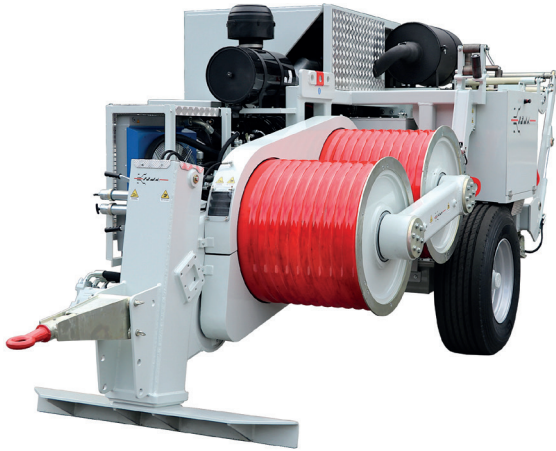

Performance

Max pull	240 kN
Max speed	4,5 km/h
Speed at max pull	2,2 km/h

Characteristics

Bull-wheels diameter	800 mm
Max rope diameter	32 mm
Weight	9300 kg

Engine

Diesel	[365 hp] 272 kW
Cooling	Liquid
Emission standard - [UE]2016/1628	Stage IIIA

Standard features

- 1 hydraulic circuit with negative brake system
- 1 dynamometer for direct reading of pulling value with load-limiter device
- Dynamic speed pulling force control
- Thermally treated steel bull-wheels
- Automatic reel-winder suitable for steel reel 1100÷1400 mm
- Remote control unit c/w console 5 m cable
- Front hydraulic stabilizer
- 2 back hydraulic stabilizers
- Rigid axle with tyres for towing up to 30 km/h
- Balanced top lifting point and anchoring attachments

Optional equipment

- 01-PW Preset for digital data recorder, counter-meter and speedometer
- 04-PW Radio control unit
- 05-PW Rope holder clamp (hydraulic)
- 07-PW Hydraulic power take-off for remote reel-winder

Special features upon request

- 13-PW Pre-heater (up to -30°C)
- 18-PW Counter-meter device
- 35-PW Engine emission standard Stage V - [272 hp] 210 kW

